




Smoke Free Evacuation


Procedure Operating Modes

The desired procedure can be set simply by touching the corresponding image. Automatically customizing suction default level based on desired surgical procedure.

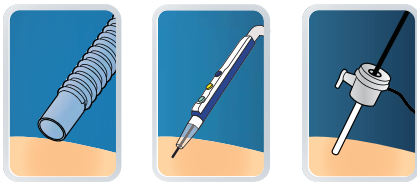

Longer Lasting Filter Life (up to 50 Hours)

Can save on running costs.

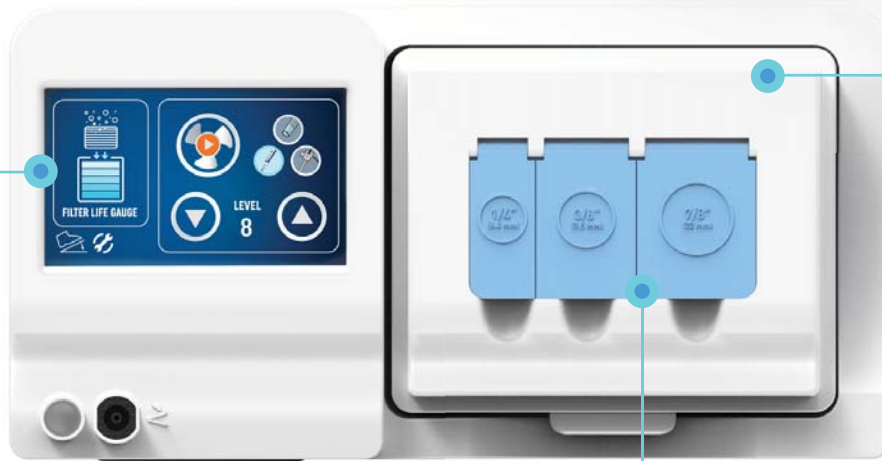


Touch Screen

The touch screen panel can be operated while wearing gloves.



Multi Port Design

Three different sized connection ports are designed to create an air-tight bond with the desired port. The port cover cap eliminates any possible contamination with the glove when connecting the hose to the unit.

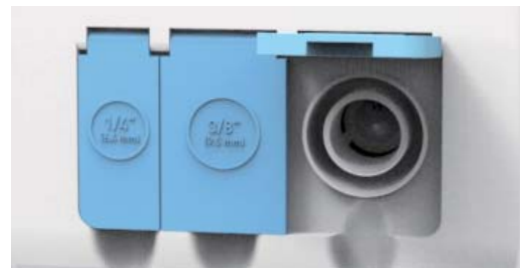

Technical Specification

| Item | Specification |
|-------------------------------|--|
| Noise Levels (Nominal Values) | Maximum power < 55 dBA |
| Dimensions (H x W x D) | 6 in x 11 in x 15.5 in (15.2 cm x 27.9 cm x 39.4 cm) |
| Flow Rates | 35 cfm (991 lpm) using 7/8 in (22 mm) tubing |
| Weight | With filter installed: 12.0 lbs (5.0 kg) Without filter installed: 9.5 lbs (4.0 kg) |
| Certifications | CE, FDA |
| Warranty | Three (3) Years Full Warranty |
| Multi Port | 1/4 in (6.4mm), 3/8 in (9.5mm), 7/8 in (22mm) |

| Model | Product Description | Included | Packaging Info. |
|---------|--|----------|-----------------|
| EQM-U | EvaQMax™ Electro Surgical Evacuator (Without filter, Includes one footswitch) | - | 1 / each |
| EQM-CAF | EvaQMax™ Filter, Multi ports design with ULPA filter | Optional | 4 / Case |
| EQM-A | EvaQMax™ Auto, Automatic Activation Device | Optional | 40 / Case |
| EQM-FT | EvaQMax™ Fluid Trap, 7/8 in (22 mm) and 1/4 in (6.4 mm) tubing connection ports | Optional | 20 / Case |

Accessories



Foot-switch (Included)



Automatic Activation Device (Optional)



Fluid Trap (Optional)