


 **MediWood**
GATE STENT



BILIARY STENT

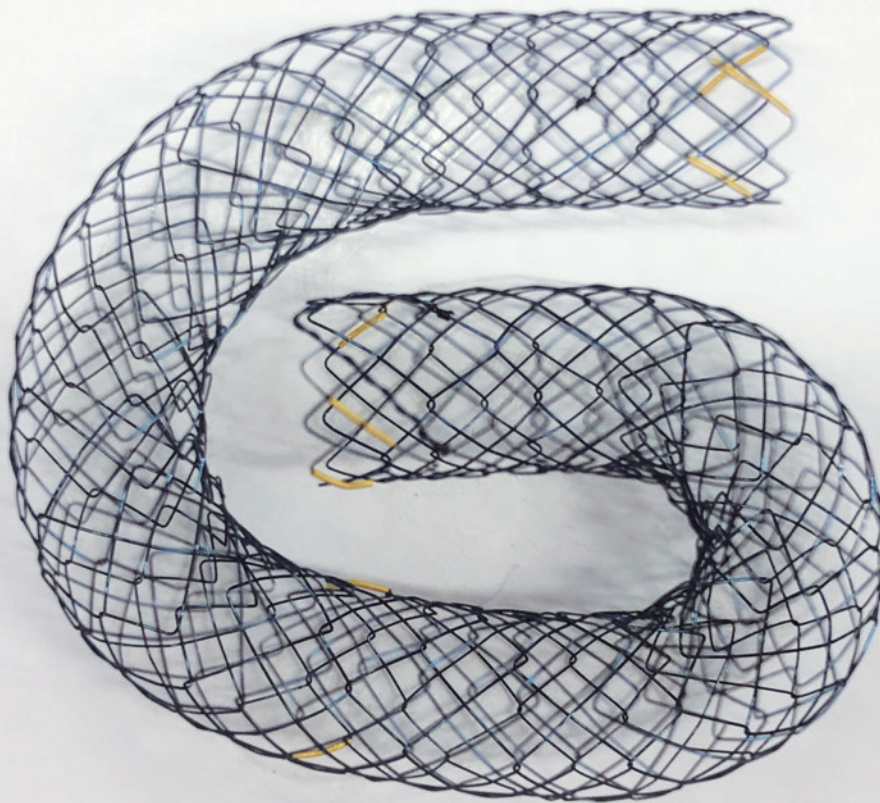


Axial Force

● **Mediwood**



● **Competitors**

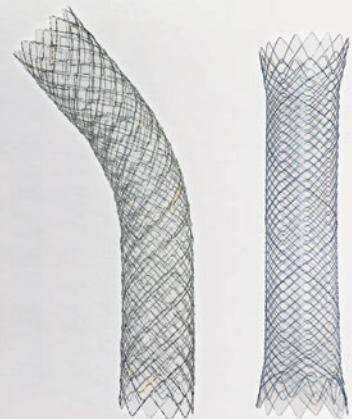

Office 301, HyupsungB/D, 65, Seongsui-ro, Seongdong-Gu, Seoul, Korea (Postal code 04781)


Tel +82-2-6959-3888

Fax +82-2-6959-3889

Email evelynryu2020@gmail.com

Homepage www.mediwood.co.kr

GATE Biliary Stent



1 Uncovered Straight Type

2 Covered Straight Type

3 Covered Flare Type



4 8Fr low profile delivery system

Indication for Uncovered Stent

- For malignant biliary obstruction

Features

- Knitted construction with small unfixed cells
- The weave rotates in both planes in different directions
- Low migration and shortening
- Excellent conformability and flexibility for placements in tortuous anatomies

Indication for Covered Stent

- For benign and malignant biliary obstruction

Features

- High flexibility and low shortening with knitted construction
- Full silicone cover to prevent tissue ingrowth
- Flare on both ends to minimize migration (Flare type)
- Retrieval string on the distal end for stent removal

Ordering Information

Endoscopic Application

Model Number	Delivery Device		Stent		Type	Straight/Flare
	Diameter (Fr/mm)	Length (mm)	Diameter (mm)	Length (cm)		
T0818-BB0804S	8/2.66	1800	8	4	Uncovered	Straight
T0818-BB0812S				12		
T0818-BB1004S	8/2.66	1800	10	4	Uncovered	Straight
T0818-BB1012S				12		
T0818-BB1204S	8/2.66	1800	12	4	Uncovered	Straight
T0818-BB1212S				12		
T0818-BC0804S	8/2.66	1800	8	4	Covered	Straight
T0818-BC0812S				12		
T0818-BC1004S	8/2.66	1800	10	4	Covered	Straight
T0818-BC1012S				12		
T0818-BC0804F	8/2.66	1800	8	4	Covered	Flare
T0818-BC0812F				12		
T0818-BC1004F	8/2.66	1800	10	4	Covered	Flare
T0818-BC1012F				12		

Increment of 10mm

Percutaneous Application

Model Number	Delivery Device		Stent		Type	Straight/Flare
	Diameter (Fr/mm)	Length (mm)	Diameter (mm)	Length (cm)		
T0805-BB0804S	8/2.66	500	8	4	Uncovered	Straight
T0805-BB0812S				12		
T0805-BB1004S	8/2.66	500	10	4	Uncovered	Straight
T0805-BB1012S				12		
T0805-BB1204S	8/2.66	500	12	4	Uncovered	Straight
T0805-BB1212S				12		
T0805-BC0804S	8/2.66	500	8	4	Covered	Straight
T0805-BC0812S				12		
T0805-BC1004S	8/2.66	500	10	4	Covered	Straight
T0805-BC1012S				12		
T0805-BC0804F	8/2.66	500	8	4	Covered	Flare
T0805-BC0812F				12		
T0805-BC1004F	8/2.66	500	10	4	Covered	Flare
T0805-BC1012F				12		

Increment of 10mm