


SUBASSEMBLIES

For Permanent Pacing Leads

P1

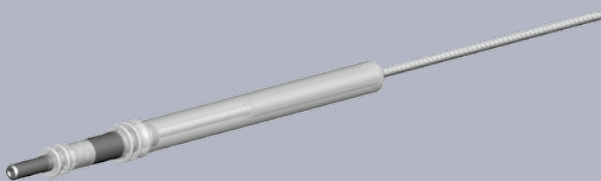

Unipolar Subassembly


IS-1 Connector with Coil

Coil	MP 35 N Quadrifilar
OD	0.81 mm
ID	0.55 mm
Wire	0.13 mm
Length	80 cm

Art.-No.:

1A-25-231Z-A-00

P2

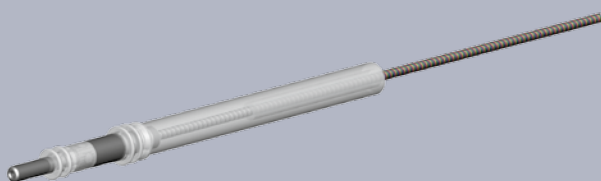

Bipolar Subassembly


IS-1 Connector with Coil

Coil	DFT Wire Bipolar
OD	0.85 mm
ID	0.52 mm
Wire	0.16 mm
Coated	Polyimid
Length	80 cm

Art.-No.:

1B-25-246Z-A-00

P3

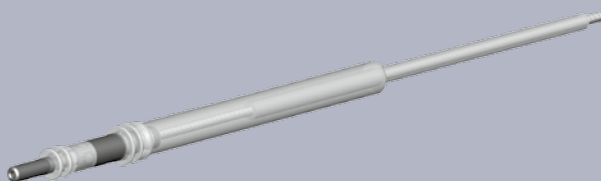

Unipolar Subassembly with medical grade Silicone Tubing


OD = 1.60 mm (5F)

Coil	MP 35 N Quadrifilar
OD	0.81 mm
ID	0.55 mm
Wire	0.13 mm
Length	80 cm

Art.-No.:

1A-25-231Z-B-00

P4

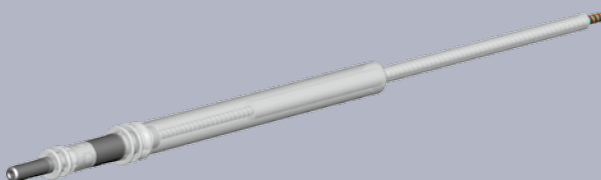

Bipolar Subassembly with medical grade PUR Tubing

OD = 1.55 mm (5F)

Coil	DFT Wire Bipolar
OD	0.85 mm
ID	0.52 mm
Wire	0.16 mm
Coated	Polyimid
Length	80 cm

Art.-No.:

1B-25-246Z-B-00