


HYDRAX OSMO

Dry out time (min)

- Activation period **15 seconds**
- Dry out time of more than **10 minutes**

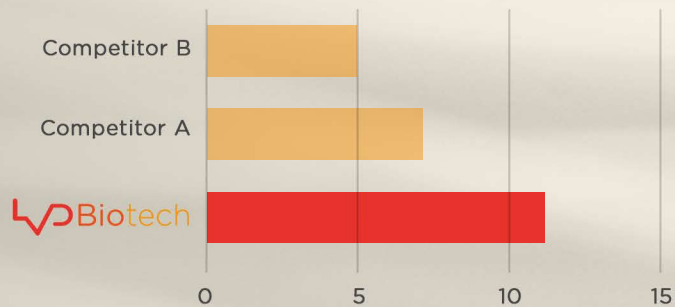

Coating remains **activated** after its removal from the wetting liquid.

A single **friction test cycle** is applied every minute until it is completely dry (F > 20 g)

Coefficient of friction

- Very low **friction** after wetting
- Excellent **Surface** appearance
- **No loss of coating** after wetting

