

HF Surgical Unit ECUT 400S

ENDOMED
S Y S T E M S

The **ECUT 400S** is an advanced high frequency electro-surgical unit. It enables the surgeon to perform mono and bipolar simultaneously.

It can be used in a wide range of applications such as: ambulatory surgery, endoscopy, first aid, gastroenterology, general surgery, gynecology, neurosurgery, otorhinolaryngology, orthopedics, pediatric surgery, plastic surgery, pneumology and urology vascular surgery.

- Twin operative activity
- Controlled cutting procedures
- Twin controlled coagulative procedures
- Wide bipolar features




ELECTROSURGICAL UNITS

ECUT 400S

EndoMed Systems HF Surgical Unit

Item No.	Description
805004	High Frequency ESU Device, Mono and Bipolar, 400 Watts with Argon compatibility

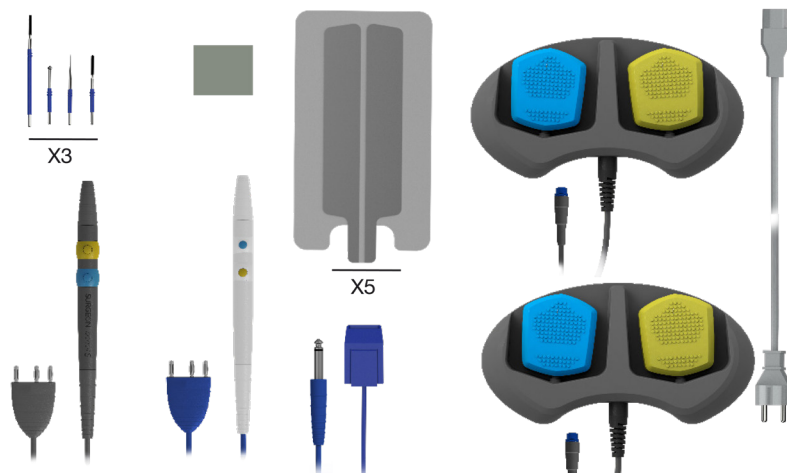

EndoMed Systems GmbH
88214 Ravensburg, Germany
www.endomed.com

Tel.: +49 (0)751 35978 0
Fax: +49 (0)751 35978 102
email@endomed.com



HF Surgical Unit

ECUT 400S

ENDOMED
S Y S T E M S

Technical Specifications

Device	ECUT 400S
Patient Circuit	F
Selectable input voltage	115 - 230 Vac
Main Frequency	50 - 60 Hz
Electrical Input Power	1000 VA
Dimensions (WxHxD)	470 x 150 x 400 mm
Weight	17,5 Kg
Controls	
Automatic power or TACS (Tissue Adaptive Contact System)	Monopolar CUT mode until 100 Watt
Controls	<ul style="list-style-type: none"> • Patient/Plate circuit monitoring • Output power monitoring • Automatic self test • H.F. Leakage currents control • Compensation of mains fluctuation
Power Outputs	
Maximum output power monopolar pure CUT	400 W - 300 Ω
Maximum output power monopolar cut-coag. CUT80%	300 W - 300 Ω
Maximum output power monopolar cut-coag. CUT60%	250 W - 300 Ω
Maximum output power monopolar cut-coag. CUT40%	200 W - 300 Ω
Maximum output power monopolar cut ENHANCED	250 W - 500 Ω
Maximum output power monopolar cut-coag. BLEND	250 W - 300 Ω
Maximum output power monopolar coag. SPEEDY	120 W - 500 Ω
Maximum output power monopolar coag. DEEP	120 W - 200 Ω
Maximum output power monopolar coag. SPRAY	100 W - 2000 Ω
Maximum output power monopolar coag. SPRAY ARGON	100 W - 2000 Ω
Maximum output power bipolar CUT	120 W - 50 Ω
Maximum output power bipolar cut-coag. CUT80%	120 W - 50 Ω
Maximum output power bipolar cut-coag. CUT60%	120 W - 50 Ω
Maximum output power bipolar cut-coag. CUT40%	100 W - 50 Ω
Maximum output power bipolar cut-coag. BLEND	120 W - 150 Ω
Maximum output power bipolar coag. COAG.	120 W - 50 Ω
Maximum output power bipolar coag. VESSEL SEALING	200 W - 50 Ω
Working frequency Monopolar/Bipolar	425 kHz / 525 kHz
Classification	
Safety	EN60601-1 EN60601-1-2 EN60601-2-2
Electrical Class	I CF
MDD 93/42/EC Class	II b

EndoMed Systems GmbH
88214 Ravensburg, Germany
www.endomed.com

Tel.: +49 (0)751 35978 0
Fax: +49 (0)751 35978 102
email@endomed.com



HF Surgical Unit ECUT 400S

ENDOMED
S Y S T E M S

Technical Specifications

Standard Accessories

- | | |
|--|---|
| • Disposable handle with switches (5pcs) | • Cable for neutral electrode |
| • Reusable handle with switches | • Disposable split neutral electrode (5pcs) |
| • Blade electrode 7 cm (3 pcs) | • Electrode cleaning sponge |
| • Blade electrode 16 cm (3 pcs) | • Double water-proof foot-switch (2 pcs) |
| • Needle electrode 7 cm (3 pcs) | • Power supply cable 5 m |
| • Ball electrode 6 cm (3 pcs) | |

Optional Accessories

- | | |
|---|--|
| • Reusable handle without finger switch | • Loop Electrode 20 x 20 l.15 cm |
| • Steel neutral electrode 16 x 24 cm with cable 3 m | • Conization Electrode 13 cm |
| • Steel neutral electrode 16 x 24 cm autoclave with cable | • Monopolar cable m4-f4 |
| • Cable for neutral plate | • Monopolar cable m4-f2.8 |
| • Bipolar Cable EU 3 m | • Monopolar cable m4-mp4 |
| • Twin Bipolar Cable 3 m | • Bipolar Forceps 11,5 cm TIP0.5 mm |
| • Bipolar artery sealer forceps cable | • Curved Bipolar Forceps 11,5 cm TIP 0.5 mm |
| • Disposable Neutral electrode | • Bipolar Forceps 20 cm TIP 1 mm |
| • Bipolar Artery Sealer 27 cm TIP 3 mm | • Bipolar Forceps 20 cm TIP 2 mm |
| • Bipolar Artery Sealer 25,5 cm TIP 3 mm | • Curved Bipolar Forceps 20 cm TIP 1 mm |
| • Bipolar Artery Sealer 17cm TIP 2 mm | • Curved Bipolar Forceps 20 cm TIP 2 mm |
| • Blade Curved Electrode 7 cm | • Angled Bipolar Forceps 20 cm TIP 1 mm |
| • Needle Curved Electrode 7 cm | • Angled Bipolar Forceps 20 cm TIP 2 mm |
| • Needle Electrode 13 cm | • Angled Curved Bipolar Forceps 20 cm TIP 1 mm |
| • Ball Electrode Ø 2 mm 6 cm | • Angled Curved Bipolar Forceps 20 cm TIP 1 mm |
| • Ball Curved Electrode Ø 2 mm 5 cm | • Bipolar Electrode 20 cm |
| • Ball Electrode Ø 3 mm 6 cm | • Bipolar Electrode 20 cm |
| • Ball Curved Electrode Ø 3 mm 5 cm | • Bipolar Electrode 20 cm |
| • Ball Electrode Ø 3 mm 13 cm | • Monopolar Forceps 20cm TIP 2 mm |
| • Ball Curved Electrode Ø 4 mm 6 cm | • Monopolar Surgical Scissors 18 cm |
| • Ball Electrode Ø 5 mm 6 cm | • Conductive rubber neutral electrode |
| • Ball Curved Electrode Ø 5 mm 6 cm | • Conductive rubber split neutral electrode |
| • Ball Electrode Ø 5 mm 14 cm | • Trolley 3 shelves wide |
| • Loop Electrode 10 x 10 l.14 cm | • Trolley 5 shelves wide |
| • Loop Electrode 20 x 13 l.14 cm | • Drawer for trolley |

ELECTROSURGICAL UNITS