

Vitrex® Flex 3 Depth Adjustable Safety Lancet

Technical Data Sheet



PRODUCT:

The Vitrex safety lancet is used to carry out skin punctures, to collect micro-samples of capillary blood.

- Adjustable penetration depth.
- Trigger position indicates the before and after use.
- Pre-loaded contact activated safety lancet.
- Quality tri-bevel needle with high-speed penetration.
- Sterile, single use and disposable.
- Ergonomic case and user-friendly design.
- Safety, after use the lancet retracts inside the case, avoiding accidents.
- Easier twist-off cap design.

The Vitrex Flex Adjustable Safety Lancet has three penetration settings:

- 1,3 mm.
- 1,8 mm.
- 2,3 mm.


VITREX

Vitrex® Flex 3

Depth Adjustable Safety Lancet

The dimensions:

- Length: 49,0 ±1,0 mm
- Width: 17,0 ±0,3 mm

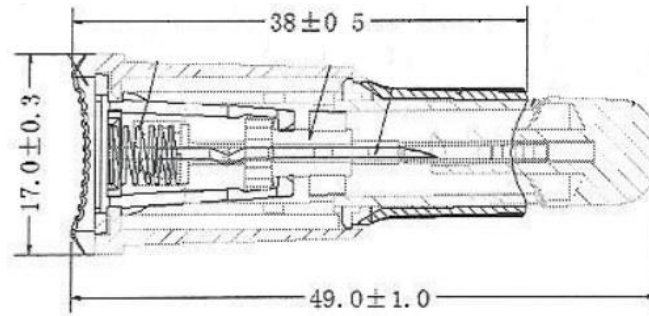

TECHNICAL SPECS:

Colour Code	Configuration	Penetration Depth	Article No.	Application
Blue	23G	1,3 mm	395813	Versatile Adjustable lancet for most common use.
		1,8 mm		
		2,3 mm		
Yellow	26G	1,3 mm	396813	Versatile Adjustable lancet for most common use.
		1,8 mm		
		2,3 mm		
Orange	28G	1,3 mm	397813	Versatile Adjustable lancet for most common use.
		1,8 mm		
		2,3 mm		

Shelf life 5 years.

MATERIALS:

The materials used to manufacture our Vitrex safety lancets are Medical grade:

Component	Material
Needle	Stainless Steel (06Cr19Ni10)
Shell	ABS – QS-0613-016
Trigger	ABS – QS-0613-016

VITREX

Vitrex® Flex 3

Depth Adjustable Safety Lancet

PRINT:

The terminology, graphic symbols and information applied to this medical device comply with EN 1041:2013 and ISO 15223-1:2016.

PACKAGING:

The inner box is made of white cardboard and the outer carton is made of corrugated cardboard. All products are packaged according to ISO 11607-1:2009 for medical devices. Each packet contains batch number, expiration date and sterilization information.

- An inner box contains 100 individual Vitrex safety lancet units.
- One outer box contains 10 inner boxes.

Inner Box			
Length	Width	Height	Quantity
13,5	9	9	100

The sizes in this table are expressed in cm.

Packaging:

Primary packaging: 100 pcs
Transit packaging: 1000 pcs
Pallet: 84000 pcs



Transit packaging

Pallet

LANGUAGES:

The labels contain 13 languages and comply accordingly to the European directive on medical devices.

French	German	Spanish	Italian	Swedish
Danish	Portuguese	Finnish	Dutch	
Russian	Arabic	Greek	English	

QUALITY:

- Quality system in compliance with ISO 9001: 2015 and ISO 13485: 2016.
- Complies with Annex II, (excluding section 4) of the Directive 93/42 EEC, 2016.
- Sterilization by gamma radiation.

VITREX